



PD79X Ex

Intrinsically Safe Digital Portable Two-way Radio

- Most Completely Certified DMR IS Radio
- ATEX/IECEX/FM/CSA/CQST IIC Certificated
- Designed for Hazardous Working Environments





PD79X Ex

Two-way radios have been productivity tool for many professionals. For those who work in environments with explosive gas and combustible dusts, safety is on top of everything, where using regular radios could be unsafe.


Hytera understands what's underneath the challenges of professionals in hazardous environments. Dedicated to designing and delivering of innovative intrinsically safe communications solutions, Hytera launched PD79X Ex, a portable DMR radio that complies with the world's strictest safety standard.



Technical Highlights


- **Improved PCB Circuit Layout & EMC Shielding**

To achieve such a high safety standard, Hytera PD79X Ex adopts optimized distributed line design on PCB, minimizing the odds of circuit fault. All the key components on the PCB are covered with shield, and the space between lines, between components, between component and shield are properly spaced, which translates to better EMC performance and less internal interference.

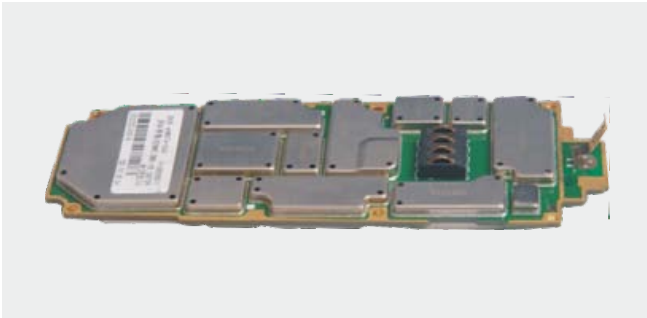

- **Innovative Silicone Encapsulating**

Silicone encapsulant technology prevents the internal circuits from interface with air and liquid which effectively stops the intrusion of liquid, dust and harmful gas. The silicone encapsulating process is delicate and complicated. As a result, every single PD79X Ex radio spends eight hours in the manufacture line.

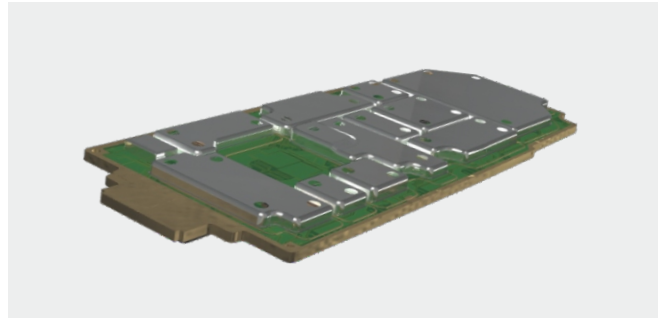

- **Innovative Electrostatic Free Design**

Hytera applies patent on electrostatic free design and dual-material molding technology in this intrinsically safe portable. The static dispersive material (blue) minimizes static accumulation on the surface, thus reducing the probability of static discharge on the radio. Meanwhile the robust material (black) maximizes the ruggedness of the enclosure.



- **Patented Battery Latch**

To disengage the battery from Hytera digital portables, the lock and bolt of the latch need to be moved along two different axes. Such a patented design ensures no disengagement of the battery pack from the main radio in case of dropping that might cause spark.





Product Features

• Environmentally Safe and High Reliability

Hytera PD79X Ex is designed upon the strict requirements of European ATEX and North American FM standards. With certifications for ATEX, IECEx, the latest FM and CSA specifications, the radio works safely in most hazardous environments even with the presence of hydrogen and dust particles. The overall design complies with the latest American Military Standard-MIL-STD-810G, which makes it can bear the harshest environments like High/Low Temperature, High Humidity, Vibration, and Shock.

• Enhanced Safety

Hytera PD79X Ex provides a dedicated emergency button. In case of any accident, a press on the button will trigger an alarm and initiate a voice call to a pre-programmed work fellow or group. Built-in Man-down, GPS and Lone Worker functions are also available with the digital portable.

PD79X Ex



• High-capacity and Safe Li-Ion Battery

Hytera PD79X Ex provides high-capacity Li-Ion battery of 1800mAh with long shift life of 17 hours under 5-5-90 duty cycle. The battery charging and discharging circuits are stringently designed to prevent overcharging or discharging causing high heat, which leads to unstable battery environments. In addition the battery cells are also encapsulated to redistribute single point heat buildup and also prevent air discharge.

• High Audio Quality and Assured Communication Based on DMR Technology

Benefitted from the advantages of DMR digital technology, PD79X Ex provides higher audio quality and stable communication performance with 40% less battery consumption than analog radios. It provides better communication quality and enhanced privacy, and moreover reduces overall equipment costs.

• Easy to Use


Hytera PD79X Ex is very easy to use. It provides tough and highly readable LCD screen and intuitive user interface. The anti-skidding and fool-proofing ergonomic designs are dedicated for user easy operation. Large PPT button and channel knobs are equally useful for users wearing gloves.

• Software Upgradable


Upgrade software enables new features without buying a new radio; could also be switched into MPT and DMR trunking modes with corresponding license applied in the same hardware.

Certification



ATEX is the European Union directive to which all two-way radios must conform if used in potentially explosive environments. It replaces the Cenelec classification in all European Union member states and EFTA countries.

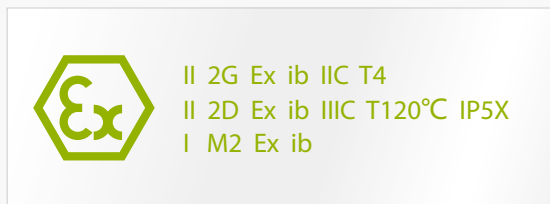

IECEx Scheme is the future route to global compliance certification. Its aim is to harmonize standards to allow free movement of goods by establishing a world-wide accepted standard.

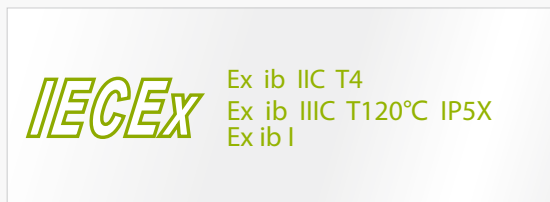

FM (FM Approvals LLC) is a member of Nationally Recognized Testing Laboratories of U.S.A. It strives to offer global services with unsurpassed technical integrity and exceptional customer satisfaction.

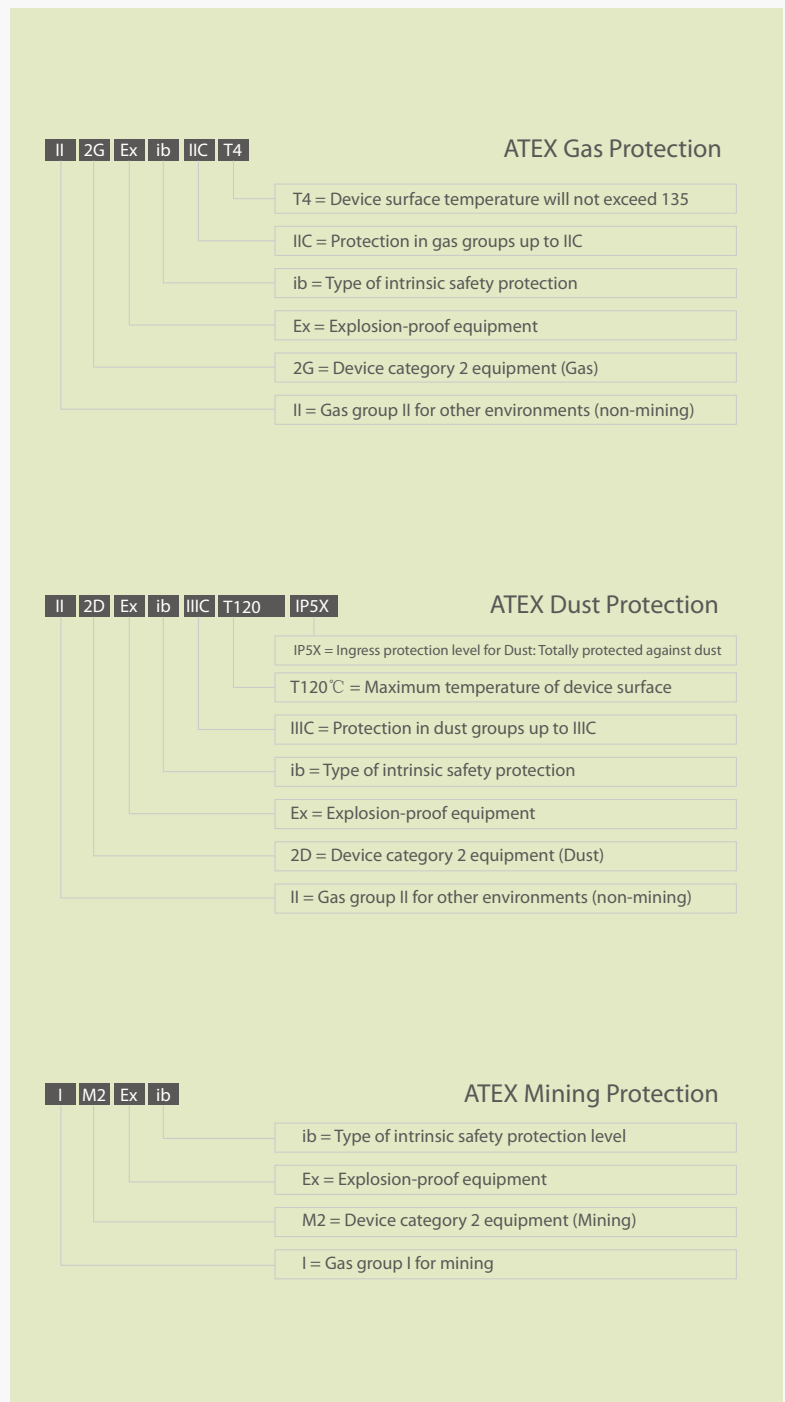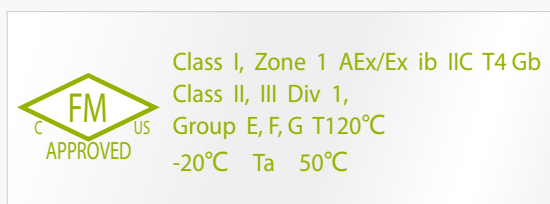

Applications



Chemical Industry

Flammable gases, liquids and solids are converted and processed in many different processes in the chemical industry. These processes may give rise to explosive mixtures.



Power Generating Companies

Lump coal, which is not explosive in mixture with air, may be converted in the conveying, grinding and drying processes into coal dusts capable of forming explosive dust/air mixtures.



Mining

The by-product of coal mining is gas. Following the coal exploiting, the gas will gather under the ground. If not in good security management, gas in coal mine can lead to serious gas explosion.



Fire Fighting

As for fire fighting, some task critical situations such as oil spill or natural gas leakage need high security electrical equipments.



Pharmaceutical Industry

Alcohols are often used as solvents in the production of pharmaceuticals. Agents and auxiliary materials that give rise to dust explosions, such as lactose, may also be used.



Refineries

The hydrocarbons handled in refineries are all flammable and, depending on their flash point, may give rise to explosive atmospheres even at ambient temperature. The area around oil processing plant is generally regarded as a place where explosive atmospheres may occur.

More Examples of Explosive Hazards...

Landfill Tips and Civil Engineering

Flammable landfill gases may arise in landfill tips. Elaborate technical arrangements are needed to avoid uncontrolled gas emission and possible ignition. Flammable gases from various sources may collect in poorly ventilated tunnels, cellars, etc.

Recycling Operations

Processing of waste for recycling can give rise to explosion hazards, e.g. from cans or other containers of flammable gases and/or liquids that have not been completely emptied or from paper or plastic dusts.

Food and Feedstuffs Industry

Explosive dusts may arise during transport and storage of grain, sugar, etc. If they are exhausted and collected by filtering, explosive atmospheres may arise in the filter.

Paint-spraying Operations

The overspray generated in paint spray bays and the solvent vapors released may give rise to explosive atmospheres when mixed with air.

Agriculture

Biogas production plants are operated on some farms. Explosive biogas/air mixtures may arise if the gas is released, e.g. by leakage.

Gas Suppliers

Explosive gas/air mixtures may be formed when natural gas is released, e.g. by leakage.



Specifications

| | | |
|--|---|---|
| General | Frequency Range | UHF1: 400-470MHz; VHF: 136-174MHz |
| | Channel Capacity | 1024 |
| | Zone Capacity | 64 (each with a maximum of 16 channels) |
| | Channel Spacing | 12.5KHz / 20KHz / 25KHz |
| | Operating Voltage | 7.4V (rated) |
| | Battery | 1800mAh (Li-Ion) |
| | Battery Life(5-5-90 Duty Cycle, High TX Power) High-capacity 1800mAh Li-Ion Battery | Analog: about 14.5 H / 13 H (GPS) Digital: about 17 H / 15 H (GPS) |
| | Frequency Stability | ±1.5ppm |
| | Antenna Impedance | 50 Ω |
| | Dimensions (H×W×D) (with standard battery, without antenna) | 141X 55 X 39 mm |
| Weight (with antenna & standard battery) | 495g | |
| LCD display | 160 x 128 pixels, 65536 color, 1.8-inch, 4 rows | |
| Anti-explosion levels | ATEX | II 2G Ex ib IIC T4 II 2D Ex ib IIIC T120°C IP5X I M2 Ex ib |
| | IECEX | Ex ib IIC T4 Ex ib IIIC T120°C IP5X Ex ib I |
| | FM/CSA | Class I, Zone 1 AEx/Ex ib IIC T4 Gb Class II, III Div 1, Group E, F, G T120 -20 ≤Ta≤50 |

| | | |
|------------------------------|----------------------------|---|
| Environmental Specifications | Operating Temperature | -20°C ~ +50°C |
| | Storage Temperature | -40°C ~ +85°C |
| | ESD | IEC 61000-4-2 (level 4) ±8kV (contact) ±15kV (air) |
| | American Military Standard | MIL-STD-810 C/D/E/F/G |
| | Dust & Water Intrusion | IP67 (non-explosion-proof) |
| | Humidity | Per MIL-STD-810 C/D/E/F/G Standard |
| | Shock & Vibration | Per MIL-STD-810 C/D/E/F/G Standard |

| | | |
|------------------|-------------------------------------|-------------|
| GPS ⁴ | TTFF (Time To First Fix) Cold Start | <1 minute |
| | TTFF (Time To First Fix) Hot Start | <10 seconds |
| | Horizontal Accuracy | <10 meters |

| | | |
|------------------|-----------------------------|---|
| Transmitter | RF Power Output | 1W |
| | FM Modulation | 11K0F3E @ 12.5KHz 14K0F3E @ 20KHz 16K0F3E @ 25KHz |
| | 4FSK Digital Modulation | 12.5KHz Data Only: 7K60FXD 12.5KHz Data & Voice: 7K60FXW |
| | Conducted/Radiated Emission | -36dBm<1GHz -30dBm>1GHz |
| | Modulation Limiting | ± 2.5KHz @ 12.5KHz ± 4.0KHz @ 20KHz ± 5.0KHz @ 25KHz |
| | FM Noise | 40dB @ 12.5KHz 43dB @ 20KHz 45dB @ 25KHz |
| | Adjacent Channel Power | 60dB @ 12.5KHz; 70dB @ 20/25KHz |
| | Audio Response | +1 ~ -3dB |
| | Audio Distortion | 3% |
| | Digital Vocoder Type | AMBE++ or SELP |
| Digital Protocol | ETSI-TS102 361-1,-2,-3 | |

| | | | |
|-----------------------------|--|--|---|
| Receiver | Sensitivity | Analog | 0.3μV (12dB SINAD) 0.22μV (typical) (12dB SINAD) 0.4μV (20dB SINAD) |
| | | Digital | 0.3μV /BER5% |
| | Selectivity TIA-603 ETSI | 60dB @ 12.5KHz/70dB @ 20 & 25KHz 60dB @ 12.5KHz/70dB @ 20 & 25KHz | |
| | Intermodulation TIA-603 ETSI | 70dB @ 12.5/20/25KHz 65dB @ 12.5/20/25KHz | |
| | Spurious Response Rejection TIA-603 ETSI | 70dB @ 12.5/20/25KHz 70dB @ 12.5/20/25KHz | |
| | Hum and Noise | 40dB @ 12.5KHz 43dB @ 20KHz 45dB @ 25KHz | |
| | Rated Audio Power Output | 0.5W | |
| | Rated Audio Distortion | ≤3% | |
| Audio Response | +1 ~ -3dB | | |
| Conducted Spurious Emission | < -57dBm | | |

⁴ Accurate long-term track (95% value>trackable for 5 satellites in rated-130dBm signal strength).

All Specifications are tested according to applicable standards, and subject to change without notice due to continuous development.

Accessories

Standard

- Li-Ion Battery
- MCU Rapid-rate Charger
- Power Adapter
- Antenna
- Belt Clip
- Leather Strap

Optional



Intrinsic Safe Remote Speaker Microphone(IP67) SM18N4-Ex



Carrying Case with (Leather) (swivel) LCY005



Programming Cable (USB Port) PC38



Intrinsic Safe Bone Conduction Headset(IP67) EBN10-Ex*1



Intrinsic Safe Noise-cancelling Headset ECN20-Ex*1



Intrinsic Safe Throat-vibrating Earpiece(IP67) ELN09-Ex*1

*1 These accessories are in certification.



Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

HYT, Hytera are registered trademarks of Hytera Communications Co.,Ltd.
© 2014 Hytera Communications Co.,Ltd. All Rights Reserved.



Hytera Communications Corporation Limited

Address: Hytera Tower, Hi-Tech Industrial Park North,Beihuan Rd., Nanshan District,Shenzhen,China

Tel: +86-755-2697 2999 Fax: +86-755-8613 7139 Post: 518057

Http://www.hytera.com Stock Code: 002583.SZ